



# 300 LB. CAST STAINLESS STEEL FLANGED & BUTTWELD "Y" STRAINERS

## MODELS: S8-300 & S7-300

PRESSURE-TEMPERATURE RATINGS	
STEAM:	300 psi @ 1125° F
WOG:	720 psi @ 100° F

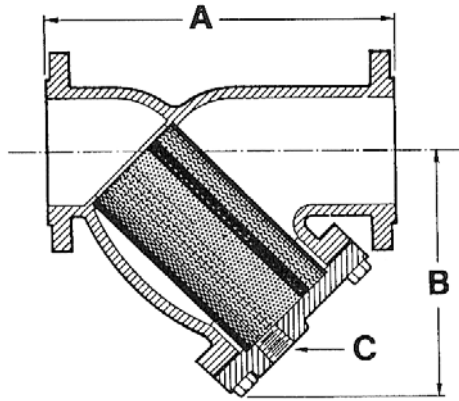

Model S8-300

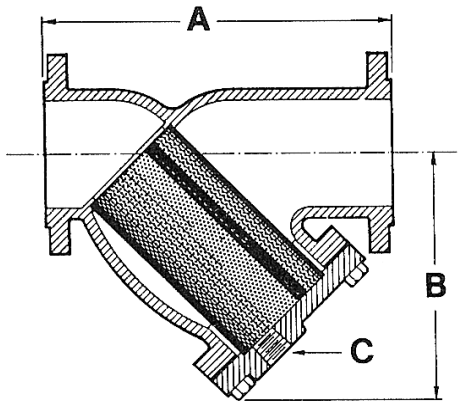

Model S7-300

DIMENSIONS & WEIGHTS APPROXIMATE  
(Apply for certified drawings)

SIZE	in.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"
	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350
A	S8-300	6 1/8	7 3/4	7 7/8	7 1/2	7 5/8	8 5/8	10 5/8	12	14 1/2	16 3/8	20	23 3/8	27 3/8	32	35
	S7-300	6 5/8	8 5/16	8 5/16	10 1/8	10 1/4	8 5/8	10 5/8	12	14 1/2	16 3/8	20	23 3/8	27 3/8	32	35
B	S8-300	3 1/2	3 3/4	3 3/4	4 3/4	4 3/4	5 1/4	6 1/2	7	8 1/4	11 1/4	13 1/2	15 3/4	19	22 1/4	25
	S7-300	3 1/2	3 3/4	3 3/4	5 1/4	5 1/4	5 1/4	6 1/2	7	8 1/4	11 1/4	13 1/2	15 3/4	19	22 1/4	25
C	NPT	3/8	1/2	1/2	1/2	1/2	1/2	1	1	1 1/2	2	2	2	2	2	2
WT (lb)	S8-300	5 1/2	12 1/4	13	18 1/4	18	22	32	49	90	120	175	300	440	650	1075
	S7-300	3	9	9	12	13	10	14	20	40	60	90	168	250	440	765

Also available in sizes 16" thru 24"

### SERVICE RECOMMENDATIONS

These strainers are designed for dependable service under demanding conditions. They offer complete protection to mechanical equipment such as pumps & valves at high temperatures & pressures. Self cleaning is easily accomplished by opening the plug or valve connected to the blow-off outlet (not supplied).

### FEATURES

All sizes feature a bolted cover machined to receive the screen. Cover gaskets are designed for high temperature service. Studs are carbon steel. Covers are normally furnished with a blowoff tapping, but without a plug. Blind covers are available.

### SCREENS

Heavy gauge 304 stainless steel screens are normally furnished in the following perforations:

<b>SERVICE:</b>	<b>1/2" - 4"</b>	<b>5" to 14"</b>
<b>Steam:</b>	<b>.033"</b>	<b>.045"</b>
<b>Liquid :</b>	<b>.062"</b>	<b>1/8"</b>

Other materials, such as Monel, Hastelloy C, & Alloy-20 are available. Other perforation sizes and/or mesh lining is also available.

### CONSTRUCTION

As a standard, the body is constructed of Stainless Steel ASTM A351 Gr. CF8M. Both models are available in Alloy 20, Monel & Hastelloy C castings. The bodies of both the S8-300 & S7-300 are designed to meet 300 lb. ANSI specifications. Model S8-300 has RF flanges and model S7-300 ends are machined to match standard weight pipe. All models have machined seats in the body & cover to ensure accurate screen alignment. The standard Teflon gasket is limited to 400° F. Consult factory for higher temperatures. Each unit is individually hydrostatically tested.

## FABROTECH INDUSTRIES, INC.

2089 NINTH AVENUE, RONKONKOMA, NEW YORK 11779

TEL: (631) 467-2040 FAX: (631) 467-2196 e-mail: [fabrotec@aol.com](mailto:fabrotec@aol.com)

[www.fabrotech.com](http://www.fabrotech.com)